

### Specification

|                                  |  |                               |
|----------------------------------|--|-------------------------------|
| Nominal Voltage                  | 12V  |                               |
| Nominal Capacity(20HR)           | 18.0AH   |                               |
| Dimensions                       | Length   | 181.5±2mm (7.14 inches)       |
|                                  | Width  | 77±1mm (3.03 inches)          |
|                                  | Container Height   | 167.5±2mm (6.59 inches)       |
|                                  | Total Height (with Terminal)   | 167.5±2mm (6.59 inches)       |
|                                  | Approx Weight  | Approx 5.4kg (11.9lbs)        |
| Terminal                         | T3   |                               |
| Container Material               | ABS  |                               |
| Rated Capacity                   | 18.0 AH/0.90A  | (20hr, 1.80V/cell, 25°C/77°F) |
|                                  | 16.7 AH/1.67A  | (10hr, 1.80V/cell, 25°C/77°F) |
|                                  | 15.1 AH/3.03A  | (5hr, 1.75V/cell, 25°C/77°F)  |
|                                  | 13.5 AH/4.49A  | (3hr, 1.75V/cell, 25°C/77°F)  |
|                                  | 11.1 AH/11.1A  | (1hr, 1.60V/cell, 25°C/77°F)  |
| Max. Discharge Current           | 270A (5s)  |                               |
| Internal Resistance              | Approx 16mΩ  |                               |
| Operating Temp. Range            | Discharge  | -15~50°C (5~122°F)            |
|                                  | Charge   | 0~40°C (32~104°F)             |
|                                  | Storage  | -15~40°C (5~104°F)            |
| Nominal Operating Temp. Range    | 25±3°C (77±5°F)  |                               |
| Cycle Use                        | Initial Charging Current less than 5.4A. Voltage   |                               |
|                                  | 14.4V~15.0V at 25°C(77°F)Temp. Coefficient -30mV/°C  |                               |
| Standby Use                      | No limit on Initial Charging Current Voltage   |                               |
|                                  | 13.5V~13.8V at 25°C(77°F)Temp. Coefficient -20mV/°C  |                               |
| Capacity affected by Temperature | 40°C (104°F)   | 103%                          |
|                                  | 25°C (77°F)  | 100%                          |
|                                  | 0°C (32°F)   | 86%                           |
| Self Discharge                   | Nitro N series batteries may be stored for up to 6 months at 25°C(77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter. |                               |

### Applications

- ◆ All purpose
- ◆ Uninterruptable Power Supply (UPS)
- ◆ Electric Power System (EPS)
- ◆ Emergency backup power supply
- ◆ Emergency light
- ◆ Railway signal
- ◆ Aircraft signal
- ◆ Alarm and security system
- ◆ Electronic apparatus and equipment
- ◆ Communication power supply
- ◆ DC power supply
- ◆ Auto control system



### Constant Current Discharge (Amperes) at 25 °C (77°F)

| F.V/Time   | 5min | 10min | 15min | 20min | 30min | 45min | 1h   | 2h   | 3h   | 4h   | 5h   | 6h   | 8h   | 10h  | 20h   |
|------------|------|-------|-------|-------|-------|-------|------|------|------|------|------|------|------|------|-------|
| 1.85V/cell | 33.9 | 25.6  | 22.7  | 19.9  | 15.3  | 11.4  | 9.11 | 5.51 | 4.13 | 3.35 | 2.84 | 2.47 | 1.96 | 1.63 | 0.884 |
| 1.80V/cell | 40.8 | 30.2  | 25.9  | 22.1  | 16.7  | 12.2  | 9.79 | 5.85 | 4.34 | 3.51 | 2.94 | 2.55 | 2.02 | 1.67 | 0.900 |
| 1.75V/cell | 45.8 | 33.0  | 27.8  | 23.4  | 17.4  | 12.8  | 10.2 | 6.07 | 4.49 | 3.60 | 3.03 | 2.62 | 2.06 | 1.70 | 0.918 |
| 1.70V/cell | 49.9 | 35.4  | 29.7  | 24.7  | 18.1  | 13.2  | 10.6 | 6.27 | 4.63 | 3.69 | 3.09 | 2.67 | 2.09 | 1.72 | 0.929 |
| 1.65V/cell | 53.8 | 37.7  | 31.1  | 25.8  | 18.9  | 13.8  | 10.9 | 6.44 | 4.73 | 3.77 | 3.14 | 2.71 | 2.12 | 1.74 | 0.938 |
| 1.60V/cell | 57.9 | 39.6  | 31.9  | 26.4  | 19.3  | 14.0  | 11.1 | 6.59 | 4.82 | 3.84 | 3.20 | 2.74 | 2.15 | 1.76 | 0.945 |


### Constant Power Discharge (Watts/cell) at 25 °C (77°F)

| F.V/Time   | 5min  | 10min | 15min | 20min | 30min | 45min | 1h   | 2h   | 3h   | 4h   | 5h   | 6h   | 8h   | 10h  | 20h  |
|------------|-------|-------|-------|-------|-------|-------|------|------|------|------|------|------|------|------|------|
| 1.85V/cell | 64.0  | 48.8  | 43.6  | 38.5  | 29.8  | 22.3  | 17.9 | 10.9 | 8.21 | 6.68 | 5.68 | 4.95 | 3.95 | 3.29 | 1.79 |
| 1.80V/cell | 76.3  | 57.2  | 49.5  | 42.7  | 32.4  | 23.9  | 19.2 | 11.5 | 8.59 | 6.98 | 5.86 | 5.09 | 4.04 | 3.36 | 1.81 |
| 1.75V/cell | 84.8  | 62.0  | 52.8  | 44.8  | 33.6  | 24.9  | 20.0 | 11.9 | 8.87 | 7.14 | 6.02 | 5.21 | 4.11 | 3.39 | 1.82 |
| 1.70V/cell | 91.1  | 65.6  | 55.7  | 46.8  | 34.7  | 25.6  | 20.6 | 12.2 | 9.06 | 7.25 | 6.08 | 5.27 | 4.15 | 3.42 | 1.83 |
| 1.65V/cell | 96.6  | 68.8  | 57.5  | 48.4  | 35.8  | 26.3  | 21.0 | 12.5 | 9.19 | 7.35 | 6.15 | 5.32 | 4.18 | 3.43 | 1.84 |
| 1.60V/cell | 101.5 | 70.8  | 58.0  | 48.7  | 36.0  | 26.5  | 21.3 | 12.7 | 9.31 | 7.45 | 6.22 | 5.33 | 4.21 | 3.45 | 1.85 |


## Dimensions

### T3 Terminal


Unit: mm

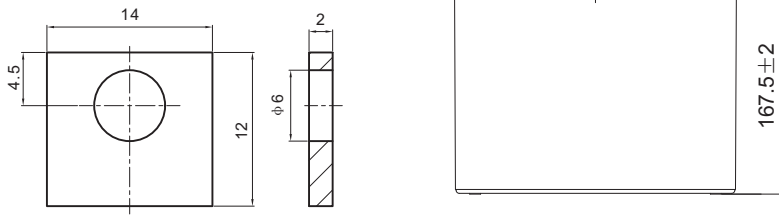


## Discharge Characteristics

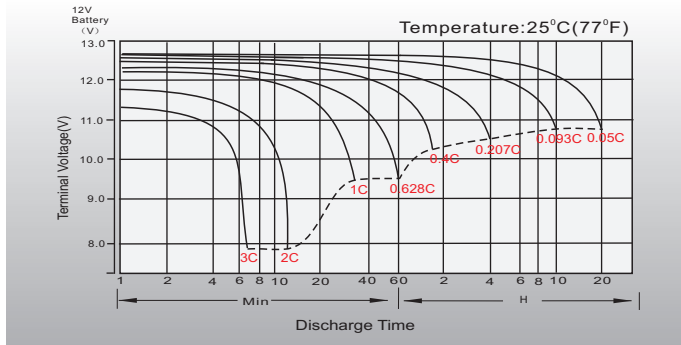


## Float Charging Characteristics

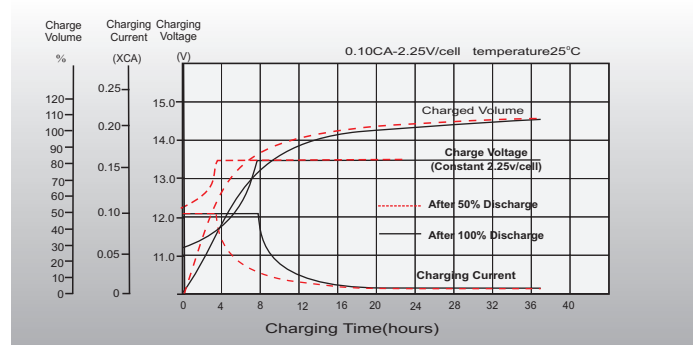


## Temperature Effects in Relation to Battery Capacity

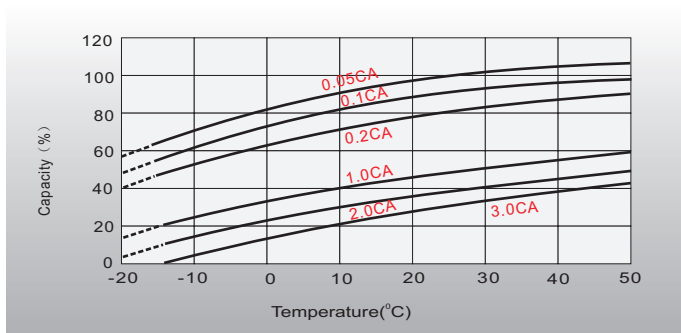


## Effect of Temperature on Long Term Float Life

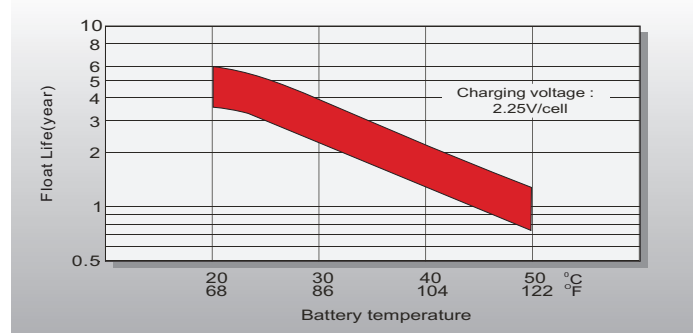

## Cycle Life in Relation to Depth of Discharge

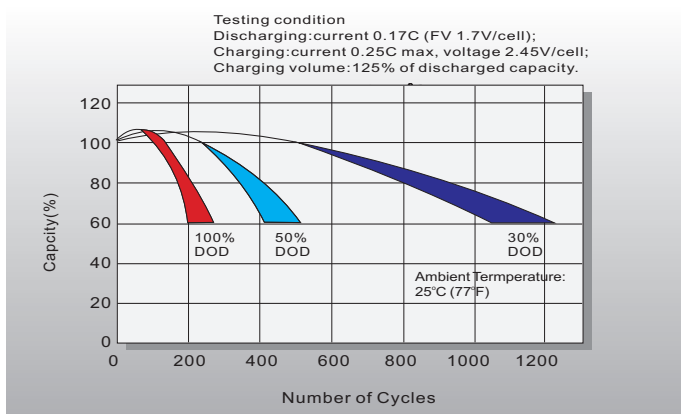

## Self Discharge Characteristics

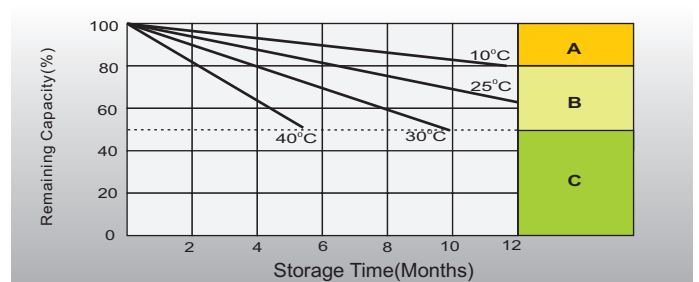

- A** No supplementary charge required (Carry out supplementary charge before use if 100% capacity is required.)
- B** Supplementary charge required before use. Optional charging way as below:  
1. Charged for above 3 days at limited current 0.25CA and constant voltage 2.25V/cell.  
2. Charged for above 20 hours at limited current 0.25CA and constant voltage 2.45V/cell.  
3. Charged for 8-10 hours at limited current 0.05CA.
- C** Supplementary charge may often fail to recover the capacity. The battery should never be left standing till this is reached.