

AWACCU

DIN number: N180 B (68022 SMF)

Flooded Sealed Maintenance free Calcium SLI battery

UN2794 wet cell lead acid battery



Professional SMF Flooded Calcium Truck / Marine SLI battery


Technical details N180 B (68022 SMF) Calcium Truck / Marine SMF Heavy Duty line

| | |
|---|------------------------------------|
| Type number / Type nummer: | N180 B (68022 SMF) |
| Voltage: | 12 Volt |
| Capacity / Capaciteit: | 180 Ah (C20) |
| Cold cranking / Startstroom: | 1080 AMP CCA EN |
| Dimensions: | L.514 * W.223 * H.196 * Th.220 mm. |
| Weight / Gewicht: | Approx 43,1 Kg |
| Layout terminal / Pool stand: | 3 ~ Positive left |
| Base holddown / voetrand: | B00 |
| Box material / Bak uitvoering: | PP |
| Colour battery / Kleur accu: | Black |
| Electrolyte density / Accuzuurgraad at 25 °C: | 1,28 ± 0,01 g/cm3 |




Drawings N180 B (68022 SMF) Truck / Marine SMF line Heavy Duty line


Terminal type

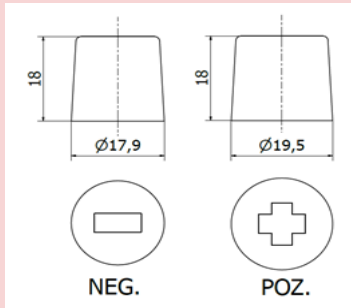

Bottom holddown

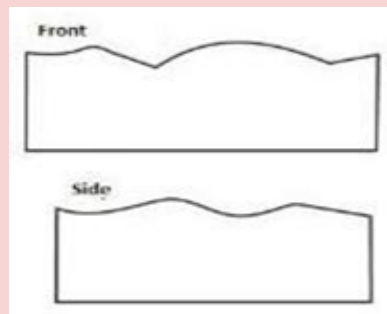

Terminal layout

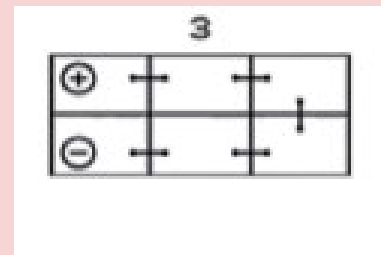

Other information:

Battery contents:

| | | |
|-------------|-----|----------|
| PB (kg): | 64% | 27,58 Kg |
| Acid (kg) : | 29% | 12,50 Kg |
| PP (kg) | 7% | 3,02 Kg |

Charging details:

| |
|-------------------------------------|
| Cyclic service: |
| 14,4 Volt Unit Average at 77C (25C) |
| Floating Service |
| 13,2 Volt Unit Average at 77C (25C) |

Always recycle N180 B battery

