

AWACCU

DIN number: N120 A (62034 SMF)

Flooded Sealed Maintenance free Calcium SLI battery

UN2794 wet cell lead acid battery




Professional SMF Flooded Calcium Truck / Marine SLI battery

Technical details N120 A (62034 SMF) Calcium Truck / Marine SMF Heavy Duty line


Type number / Type nummer:	N120 A (62034 SMF)	
Voltage:	12 Volt	
Capacity / Capaciteit:	120 Ah (C20)	
Cold cranking / Startstroom:	760 AMP CCA EN	
Dimensions:	L.514 * W.189 * H.196 * Th.215 mm.	
Weight / Gewicht:	Approx 32 Kg	
Layout terminal / Pool stand:	3 ~ Positive left	
Base holddown / voetrand:	B01	
Box material / Bak uitvoering:	PP	
Colour battery / Kleur accu:	Black	
Electrolyte density / Accuzuurgraad at 25 °C:	1,28 ± 0,01 g/cm3	

Drawings N120 A (62034 SMF) Truck / Marine SMF line Heavy Duty line


Terminal type

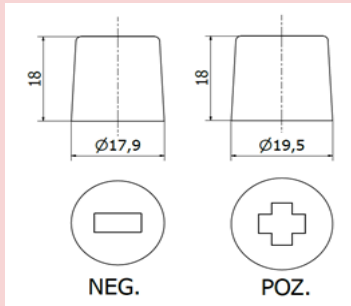

Bottom holddown

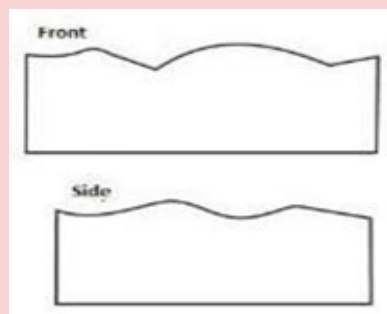

Terminal layout

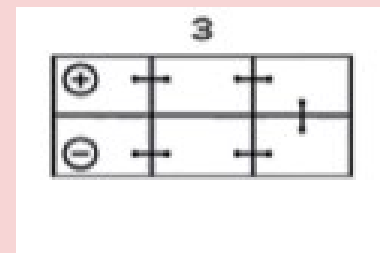

Other information:

Battery contents:

PB (kg):	64%	20,48 Kg
Acid (kg) :	29%	9,28 Kg
PP (kg)	7%	2,24 Kg

Charging details:

Cyclic service:
14,4 Volt Unit Average at 77C (25C)
Floating Service
13,2 Volt Unit Average at 77C (25C)

Always recycle N120 A battery

